

Locking prongs inserts into concrete. The one-piece design assures maximum strength.



MATERIAL: 12 gauge. **FINISH:** Galvanized

INSTALLATION: • Use all specified fasteners. See General Notes.

- Holes are provided for installation with either 16d commons or 1/2" bolts for PB66 and PB66R; all other models use 16d commons only.
- A 2" minimum sidecover is required to obtain the full load.
- Not recommended for non-top-supported installations such as fences.

CODES: See page 8 for Code Listing Key Chart.

Model No.	Dimensions		Uplift Avg Ult	Allowable Loads				Code Ref.
	W	L		12-16d Nails (133 & 160)			2- 1/2 MB	
				Uplift	F ₁	F ₂	Uplift (133 & 160)	
PB44	3 3/16	3 3/4	4267	1365	765	1325	—	7, 40, 90, 123
PB44R	4	3 3/4	4267	1365	765	1325	—	
PB46	5 1/2	3 3/4	4267	1365	765	1325	—	
PB46R	6	3 3/4	4267	1365	765	1325	—	
PB66	5 1/2	5 1/4	5143	1640	765	1325	1640	
PB66R	6	5 1/4	5143	1640	765	1325	1640	

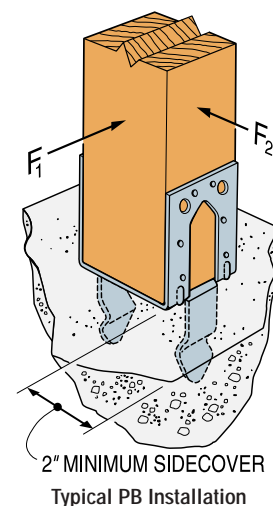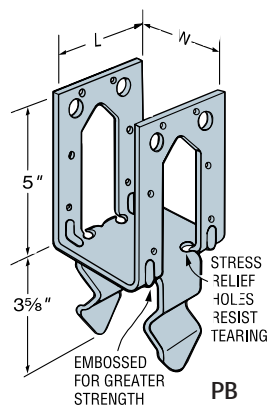

1. Allowable loads have been increased 33% and 60% for earthquake or wind loading, with no further increase allowed; reduce where other loads govern.