

Standardized 45° skewed hangers, angled slots direct nails to allow proper installation.

MATERIAL: SUR and SUL—16 gauge;
HSUR and HSUL—14 gauge

FINISH: Galvanized

INSTALLATION: • Use all specified fasteners.
See General Notes.

- These hangers will normally accommodate a 40° to 50° skew.

• **Illustration shows left and right skews SUR/L (SUR=skewed right; SUL=skewed left).**


- The joist end may be square cut or bevel cut.

OPTIONS: • Available with the A2 flange turned in on the 2-2x and 4x models only (see illustration).

- To order, add "C" (for concealed) to the product name.

- For example, specify HSURC46, HSULC46, SURC46, or SULC46.

CODES: See page 8 for Code Listing Key Chart.

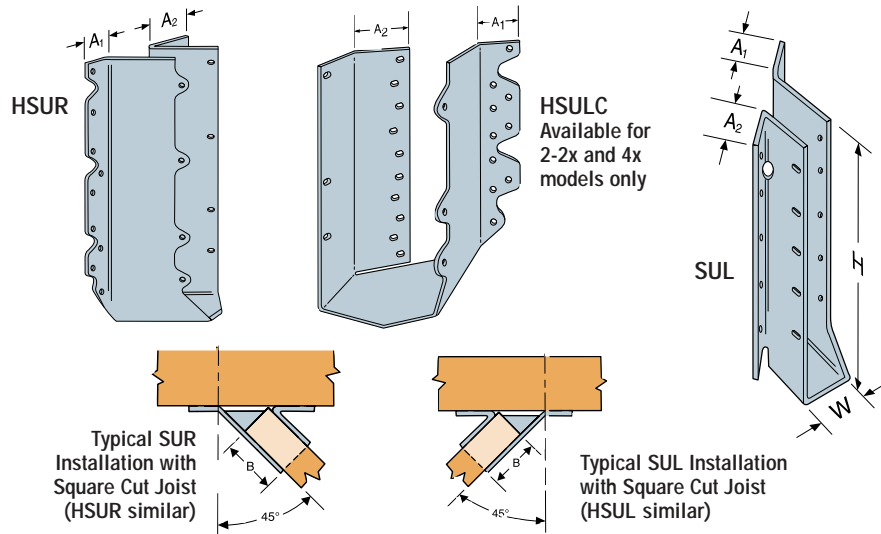

Joist Size	Model No.	Dimensions					Fasteners		Allowable Loads										Code Ref.
		W	H	B	A ₁	A ₂	Face	Joist	DF/SP Species Header					SPF Species Header					
									Uplift (133)	Uplift (160)	Floor (100)	Roof		Uplift (133)	Uplift (160)	Floor (100)	Roof		
										Snow (115)	Const (125)					Snow (115)	Const (125)		
2x4	SUR/L24	1 ⁵ / ₁₆	3 ¹ / ₂	2	1 ¹ / ₈	1 ¹ / ₄	4-16d	4-10dx1 ¹ / ₂	450	450	530	610	665	415	450	460	530	575	
2x6, 8	SUR/L26	1 ⁵ / ₁₆	5	2	1 ¹ / ₈	1 ³ / ₁₆	6-16d	6-10dx1 ¹ / ₂	720	765	800	960	1000	625	750	690	795	860	
2x10, 12	SUR/L210	1 ⁵ / ₁₆	8 ³ / ₈	2	1 ¹ / ₈	1 ⁵ / ₁₆	10-16d	10-10dx1 ¹ / ₂	1200	1250	1330	1530	1660	1040	1250	1150	1320	1440	
2x14	SUR/L214	1 ⁵ / ₁₆	10	2	1 ¹ / ₈	1 ⁵ / ₁₆	12-16d	12-10dx1 ¹ / ₂	1440	1730	1595	1835	1995	1250	1500	1380	1585	1725	
3x10, 12	SUR/L310	2 ³ / ₁₆	8 ⁵ / ₁₆	2 ⁵ / ₈	1 ¹ / ₂	2	14-16d	6-10dx1 ¹ / ₂	720	765	1860	2140	2330	625	750	1610	1785	1785	
3x14	SUR/L314	2 ³ / ₁₆	13	2 ⁵ / ₈	1 ¹ / ₂	2	18-16d	8-10dx1 ¹ / ₂	960	1150	2395	2500	2500	830	1000	1795	1795	1795	
(2) 2x6, 8	SUR/L26-2	3 ¹ / ₈	4 ⁵ / ₁₆	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	8-16d	4-16dx2 ¹ / ₂	710	815	1065	1225	1330	615	735	920	1005	1005	
(2) 2x6, 8	HSUR/L26-2	3 ¹ / ₈	4 ⁵ / ₁₆	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	12-16d	4-16dx2 ¹ / ₂	715	815	1610	1850	2000	620	740	1390	1600	1740	
(2) 2x10, 12	SUR/L210-2	3 ¹ / ₈	8 ³ / ₈	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	14-16d	6-16dx2 ¹ / ₂	1065	1275	1860	2140	2330	920	1105	1610	1850	2010	
(2) 2x10, 12	HSUR/L210-2	3 ¹ / ₈	8 ³ / ₈	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	20-16d	6-16dx2 ¹ / ₂	1070	1285	2680	3080	3350	930	1115	2320	2670	2900	
(2) 2x14	SUR/L214-2	3 ¹ / ₈	12 ¹ / ₁₆	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	18-16d	8-16dx2 ¹ / ₂	1430	1700	2395	2500	2500	1225	1470	1795	1795	1795	
(2) 2x14	HSUR/L214-2	3 ¹ / ₈	12 ¹ / ₁₆	2 ⁷ / ₁₆	1 ¹ / ₄	2 ³ / ₁₆	26-16d	8-16dx2 ¹ / ₂	1430	1715	3485	4005	4355	1235	1485	3015	3470	3770	
4x6, 8	SUR/L46	3 ¹ / ₁₆	4 ³ / ₄	2 ¹ / ₁₆	1	2 ³ / ₁₆	8-16d	4-16d	710	815	1065	1225	1330	615	735	920	1005	1005	
4x6, 8	HSUR/L46	3 ¹ / ₁₆	4 ³ / ₄	2 ¹ / ₁₆	1	2 ³ / ₁₆	12-16d	4-16d	715	815	1610	1850	2000	620	740	1390	1600	1740	
4x10, 12	SUR/L410	3 ¹ / ₁₆	8 ¹ / ₂	2 ¹ / ₁₆	1	2 ³ / ₁₆	14-16d	6-16d	1065	1275	1860	2140	2330	920	1105	1610	1850	2010	
4x10, 12	HSUR/L410	3 ¹ / ₁₆	8 ¹ / ₂	2 ¹ / ₁₆	1	2 ³ / ₁₆	20-16d	6-16d	1070	1285	2680	3080	3350	930	1115	2320	2670	2900	
4x14	SUR/L414	3 ¹ / ₁₆	12 ¹ / ₂	2 ¹ / ₁₆	1	2 ³ / ₁₆	18-16d	8-16d	1420	1700	2395	2500	2500	1225	1470	1795	1795	1795	
4x14	HSUR/L414	3 ¹ / ₁₆	12 ¹ / ₂	2 ¹ / ₁₆	1	2 ³ / ₁₆	26-16d	8-16d	1430	1715	3485	4005	4355	1235	1485	3015	3470	3770	

1. Uplift loads have been increased by 33% and 60% for earthquake or wind loading with no further increase allowed; reduce where other loads govern.

2. Roof loads are 125% of floor loads unless limited by other criteria.