

**The newly improved IUS is now fully compatible with shallow flange I-joists!**

I-joists with flange thicknesses between 1 $\frac{1}{16}$ " and 1 $\frac{1}{2}$ " achieve the full allowable table loads including uplift values and joist nails are not required! The IUS is a hybrid hanger that incorporates the advantages of the face mount and top mount hanger. Installation is fast with the Strong-Grip and Snap-In joist features along with easy-to-reach face nail locations and self-jigging locator tabs.

The MIU series hangers are designed for commercial and high load I-joist applications without requiring web stiffeners. The MIU features Positive Angle Nailing (PAN), which minimizes splitting of the flanges while permitting time-saving nailing from a better angle.

The IUT features a bend-tab which nails vertically into the I-joist's bottom flange when web stiffeners are not used, or directly into the web stiffener. This constrains the member, helping to reduce squeaks resulting from joist movement.

**MATERIAL:** See table page 68-70.

**FINISH:** Galvanized

**UPLIFT LOADS:** • Models have optional triangle joist nail holes for additional uplift. Properly attached web stiffeners are required.

- IUT—add two additional 10d x 1 $\frac{1}{2}$ " joist nails for a total uplift load of 480 lbs and 575 lbs (33% and 60% increase respectively).
- MIU—add four additional 10d x 1 $\frac{1}{2}$ " joist nails for a total uplift load of 720 lbs and 865 lbs (33% and 60% increase respectively).
- IUS—for additional uplift capacity options refer to technical bulletin T-OPTUPLIFTCWP.


**INSTALLATION:** • Use all specified fasteners.

Verify that the header can take the required fasteners specified in the table. See pages 64-65 for more installation information.


- IUS—fasten hanger to header. Position I-joist into hanger and snap into place. No joist nailing required. Some IUS models have triangle and round header nail holes. To achieve Max. download, fill both round and triangle holes.
- IUT—optional seat diamond hole allows pre-attachment of hanger to joist before installation.
- Web stiffeners are not required with I-joists when the joist top flange is laterally supported by the sides of the hanger. I-joist manufacturers may require web stiffeners.

**OPTIONS:**

These hangers cannot be modified. However, these models will normally accommodate a skew of up to 5°. For a sloping joist to 1/2 :12, tests show a 10% reduction in ultimate hanger strength. Local crushing of the bottom flange or excessive deflection may be limiting; check with joist manufacturer for specific limitations on bearing of this type.

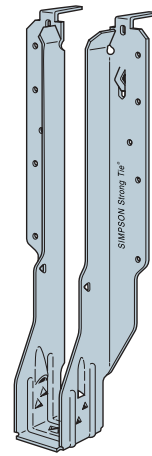

Snap-In Teardrop  
No nails required!




Strong-Grips holds bottom chord in position


**IUS**  
(some IUS models have triangle holes in header flanges for Min/Max nailing)  
U.S. Patent Pending

Starburst detail allows secure seating of joist.


**IUS INSTALLATION SEQUENCE**




**STEP 1**  
Attach the IUS to the header




**STEP 2**  
Slide the I-joist into the IUS until it rests above the large teardrop.

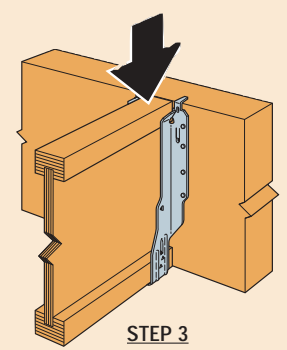


**STEP 3**  
Firmly push or snap I-joist fully into the seat of the IUS.

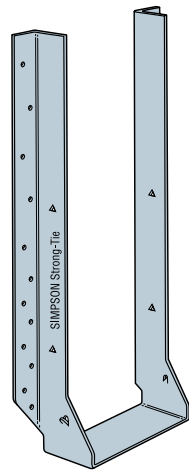

**MIU**




**MIU with correct PAN installation**

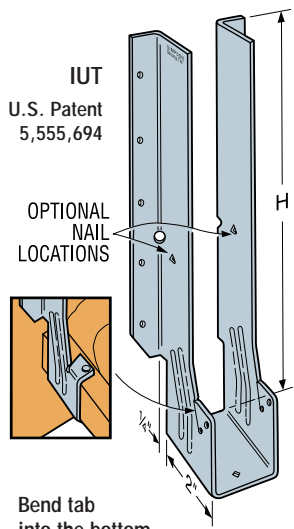


**IUT**  
U.S. Patent 5,555,694

OPTIONAL NAIL LOCATIONS



Bend tab into the bottom flange and fasten with 10d x 1 $\frac{1}{2}$ " nails when web stiffeners are not used to help reduce floor squeaks.

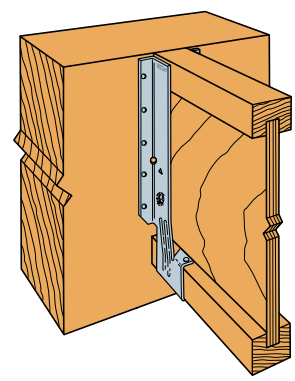

**Typical IUT Installation**