

ORNAMENTAL CONNECTORS



FINISH: Textured powder-coated flat black paint.


INSTALLATION: • Use all specified fasteners.
See General Notes.

- OHU cannot be modified. (*Zinc-colored SDS fasteners supplied with hanger*)
- Bolts are not supplied with other ornamentals.

CODES: See page 8 for Code Listing Key Chart.

Model No.	Ga	Dimensions			Fasteners		Allowable Loads ^{1,2}		Code Ref.
		W	H	L	Qty	Dia	(133)	(160)	
STRAP TIES									
OS	12	2	—	12	4	½	1280	1535	170
OHS	7	2½	—	12	4	⅝	1630	1955	
OHS135	7	6	—	13½	4	¾	4100	4920	
OHS195	7	6	—	19½	8	¾	8170	9800	
OL	12	2	12	12	4	½	—	—	180
OHL	7	2½	12	12	4	⅝	—	—	
OT	12	2	12	12	6	½	—	—	
OHT	7	2½	12	12	6	⅝	—	—	
HEAVY ANGLES									
OHA33	7	3½	—	3	2	¾	—	—	180
OHA36	7	3½	—	6	4	¾	—	—	

1. Allowable loads are based on parallel-to-grain loading and a minimum member thickness of 3½" with bolts in single shear.
2. Allowable loads have been increased 33% and 60% for earthquake or wind loading with no further increase allowed; reduce where other loads govern.

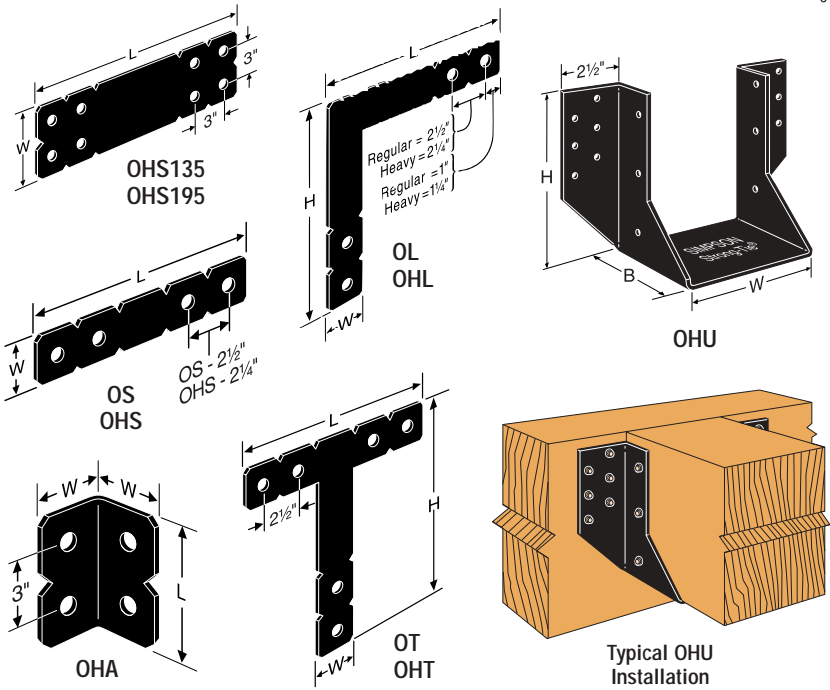

Joist Size	Model No.	Ga	W	H	B	No. of SDS ¼x3 Wood Screws		Douglas Fir					Spruce Pine Fir					Code Ref.
						Face	Joist	Uplift (133)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Uplift (133)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	
								Face	Joist	Uplift (133)	Uplift (160)	Floor (100)	Snow (115)	Roof (125)	Uplift (133)	Uplift (160)	Floor (100)	
4x6	OHU46-SDS3	12	3⅝	5	4	6	4	1535	1535	1840	2120	2305	1290	1290	1585	1820	1980	170
4x8	OHU48-SDS3	12	3⅝	6¾	4	8	6	1535	1535	2455	2675	2675	1290	1290	2110	2245	2245	
4x10	OHU410-SDS3	12	3⅝	8¾	4	12	6	2455	2525	3685	4235	4605	2110	2120	3170	3645	3960	
4x12	OHU412-SDS3	12	3⅝	10¾	4	12	8	2525	2525	3685	4235	4605	2120	2120	3170	3645	3960	
4x14	OHU414-SDS3	12	3⅝	12¾	4	14	10	2525	2525	4300	4945	5375	2120	2120	3695	4250	4620	
6x6	OHU66-SDS3	12	5½	5	4	6	4	1535	1535	1840	2120	2305	1290	1290	1585	1820	1980	
6x8	OHU68-SDS3	12	5½	7	4	12	6	2455	2525	3685	4235	4605	2110	2120	3170	3645	3960	
6x10	OHU610-SDS3	12	5½	9	4	14	6	2455	2525	4300	4945	5375	2110	2120	3695	4250	4620	
6x12	OHU612-SDS3	12	5½	11	4	16	8	2525	2525	4910	5630	5630	2120	2120	4225	4730	4730	
6x14	OHU614-SDS3	12	5½	13	4	18	10	3950	3950	5525	6355	6860	3320	3320	4750	5465	5765	

1. Allowable loads have been increased 33% and 60% for earthquake or wind loading with no further increase allowed; reduce where other loads govern.